

ABBREVIATIONS

A.B. - ANCHOR BOLT	E. - EAST	MAS. - MASONRY	S. - SOUTH
ACDUS. - ACUSTICAL	EA. - EACH	MAT'L. - MATERIAL	SCHED. - SCHEDULE
ADJ. - ADJUSTABLE	E.C. - ELECTRICAL CONTRACTOR	MAX. - MAXIMUM	SGFT. - STRUCTURAL GLAZED
A.F.F. - ABOVE FINISH FLOOR	E.I.F.S. - EXTERIOR INSULATED FINISH SYSTEM	ME. - MECHANICAL CONTRACTOR	FACING TILE
ALT. - ALTERNATE	E.J. - EXPANSION JOINT	MECH. - MECHANICAL (LY)	SHT. - SHEET
ALUM. - ALUMINUM	ELEC. - ELECTRIC (AL)	MFGR. - MANUFACTURER	SIM. - SIMILAR
ANOD. - ANODIZED	ELEV. - ELEVATION	MIN. - MINIMUM	SPECS. - SPECIFICATIONS
A.P. - ACCESS PANEL	EPDM. - ETHYLENE PROPYLENE DIENE TERPOLYMER	MINUTE - MINUTE	SQ. - SQUARE
APPROX. - APPROXIMATELY	EQ. - EQUAL	MISC. - MISCELLANEOUS	S.S. - STAINLESS STEEL
ARCH. - ARCHITECT (URAL)	EQUIP. - EQUIPMENT	M.D. - MASONRY OPENING	STC. - SOUND TRANSMISSION COEFFICIENT
ASPH. - ASPHALT	ETR. - EXISTING TO REMAIN	MTD. - MOUNTED	STD. - STANDARD
B. - BOTTOM	EWC. - ELECTRIC WATER COOLER	MTL. - METAL	STL. - STEEL
B.B. - BULLETIN BOARD	EXIST. - EXISTING	MULL. - MULLION	STOR. - STORAGE
BC. - BOTTOM OF CURB	EXP. - EXPANSION	N. - NORTH	STRUCT. - STRUCTURAL
BD. - BOARD	EXT. - EXTERIOR	NO. - NUMBER	
BIT. - BITUMINOUS	F.D. - FLOOR DRAIN	NDM. - NOMINAL	
BKHD. - BULKHEAD	FDN. - FOUNDATION	N.T.S. - NET TO SCALE	
BLDG. - BUILDING	F.E. - FIRE EXTINGUISHER	O.C. - ON CENTER	
BLK. - BLOCK	F.E.C. - FIRE EXTINGUISHER CABINET	O.D. - OUTSIDE DIAMETER	
BLKG. - BLOCKING	FIN. - FINISH	O.F.D. - OVERFLOW DRAIN	
BOTT. - BOTTOM	FLR. - FLOOR	OPNG. - OPENING	
BRG. - BEARING	FT. - FOOT, FEET	OPP. - OPPOSITE	
C.B. - CHALKBOARD	FTG. - FOOTING	P.C. - PRECAST/PORTLAND CEMENT	
C.J. - CONTROL JOINT	F.V. - FIELD VERIFY	P.C.C. - PRECAST CONCRETE	
CLG. - CEILING	GA. - GAGE, GUAGE	PL. - PLATE	
CMU. - CONCRETE MASONRY UNIT	GAL.V. - GALVANIZED	PLAS. - PLASTIC	
COL. - COLUMN	GC. - GENERAL CONTRACTOR	PL.LAM. - PLASTIC LAMINATE	
COMB. - COMBINATION	GL. - GLASS, GLAZING	PLST. - PLASTER	
CONC. - CONCRETE	GR. - GRADE	PLYWD. - PLYWOOD	
CONSTR. - CONSTRUCTION	GYP. - GYPSUM	PNL. - PANEL	
CONT. - CONTINUOUS	H.C. - HANDICAPPED	PR. - PAIR	
CONTR. - CONTRACTOR	HDW. - HARDWARE	PSF. - POUNDS PER SQUARE FOOT	
CORR. - CORRODED	H.M. - HARDWOOD	PSI. - POUNDS PER SQUARE INCH	
CPT. - CARPET	HR. - HOLLOW METAL	PT. - PAINT	
C.T. - CERAMIC TILE	HT. - HEIGHT	PTD. - PAINTED	
D. - DEEP	HVAC - HEATING/VENTILATING/AIR CONDITIONING	Q.T. - QUARRY TILE	
DBL. - DOUBLE	I.D. - INSIDE DIAMETER	R. - RADIUS	
DET. - DETAIL	INSUL. - INSULATION (INSULATING)	R.B. - RUBBER BASE	
D.F. - DRINKING FOUNTAIN	INT. - INTERIOR	R.D. - ROOF DRAIN	
DIA. - DIAMETER	INV. - INVERT	REF. - REFRIGERATOR	
DIAG. - DIAGONAL	JT. - JOINT	REINF. - REINFORC (ED), (ING)	
DIM. - DIMENSION	L. - LONG	REM. - REMOVABLE	
D.S. - DOWN SPOUT	LAM. - LAMINATE (D)	REQ'D - REQUIRED	
D.W. - DRYWALL	LLH. - LONG LEG HORIZONTAL	REV. - REVIS (ED), (ION)	
DVG. - DRAWING	LLV. - LONG LEG VERTICAL	RM. - ROOM	
	LT.WT. - LIGHT WEIGHT	R.D. - ROUGH OPENING	

MATERIAL LEGEND

	CONCRETE BLOCK
	BRICK
	METAL STUD AND DRYWALL PARTITION
	GYPSUM BOARD
	COMPACTED GRANULAR FILL
	EARTH
	WOOD BLOCKING
	FINISH WOOD
	PLYWOOD
	RIGID INSULATION
	BATT INSULATION
	STEEL
	CONCRETE

SYMBOLS LEGEND

	VESTIBULE	- ROOM NAME & NUMBER
	(101)	- DOOR AND BORROWED LITE NUMBER
	(A)	- COLUMN LINE IDENTIFICATION
	(W1)	- WINDOW TYPE IDENTIFICATION
	(E21)	- CASEWORK/EQUIPMENT IDENTIFICATION
	(2)	- KEYED NEW CONSTRUCTION NOTE
	D 13	- DETAIL
	S 2	- SECTION
	(5)	- KEYED DEMOLITION PLAN NOTE
	E 2	- ELEVATION
		- EXISTING DOOR
		- NEW DOOR
		- ITEMS TO BE REMOVED

WALL TYPES

PLAN DIMENSION	1/8" PLAN INDICATION	ENLARGED PLAN INDICATION	WALL TYPE DESCRIPTION
VARIES			EXISTING MASONRY WALL
1 1/2"			EXISTING CONSTRUCTION 7/8" MTL. FURRING CHANNELS @ 16" O.C. 5/8" GYPSUM BOARD
2 1/8"			EXISTING CONSTRUCTION 1 1/2" MTL. "Z" FURRING CHANNELS @ 16" O.C. 5/8" GYPSUM BOARD
3 1/8"			CONCRETE OF EXISTING CONSTRUCTION 2 1/2" MTL. STDS. @ 16" O.C. 5/8" GYPSUM BOARD
4 1/4"			EXISTING CONSTRUCTION 5/8" GYPSUM BOARD 3 5/8" MTL. STDS. @ 16" O.C.
4 7/8"			EXISTING CONSTRUCTION 5/8" GYPSUM BOARD, BOTH SIDES 3 5/8" METAL STUDS @ 16" O.C. ACOUSTICAL INSULATION WHERE INDICATED IN DOCUMENTS
7 5/8"			8" (NOMINAL) CONCRETE BLOCK MASONRY
9"			8" (NOMINAL) CONCRETE BLOCK MASONRY 1/2" RESILIENT CHANNELS @ 16" O.C. 5/8" GYPSUM BOARD
9 1/8"			8" (NOMINAL) CONCRETE BLOCK MASONRY 7/8" MTL. FURRING CHANNELS @ 16" O.C. 5/8" GYPSUM BOARD
10 5/8"			5/8" GYPSUM BOARD 7/8" MTL. FURRING CHANNELS @ 16" O.C. 8" (NOMINAL) CONCRETE BLOCK MASONRY 7/8" MTL. FURRING CHANNELS @ 16" O.C. 5/8" GYPSUM BOARD
1'-4"			4" FACE BRICK 2" RIGID INSULATION 8" (NOM.) CONCRETE BLOCK MASONRY 1 1/2" MTL. "Z" FURRING CHANNELS @ 16" O.C. 6 MIL. VAPOR BARRIER 5/8" GYPSUM BOARD
12"			2" RIGID INSULATION 12" C.I.P. CONCRETE WALL
1'-2 1/8"			2" RIGID INSULATION 12" C.I.P. CONCRETE WALL 1 1/2" MTL. "Z" FURRING CHANNELS @ 16" O.C. 5/8" GYPSUM BOARD
VARIES			2 HOUR RATED WALL CONSTRUCTION
VARIES			1 HOUR RATED WALL CONSTRUCTION

The InterDesign Group, Inc.
141 East Ohio Street
Indianapolis, Indiana 46204
317/263-9655 Fax 317/263-9644

Goshen Public Library
Addition & Renovation
601 South Fifth Street Goshen, Indiana
Abbrev, Materials & Symbols
Legends and Wall Types

Mark Revision



Dwn By **CSM** Chkd By **CSM**


Date **August 19, 1993**

These drawings are the property of the Architect and are not to be reused or reproduced without his written permission.

Project Number **921030**

Sheet Number

A
0.1

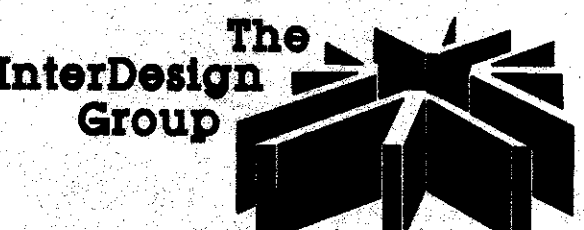

Total Architectural Development